


Chapter 7

Hydrologic Soil Groups

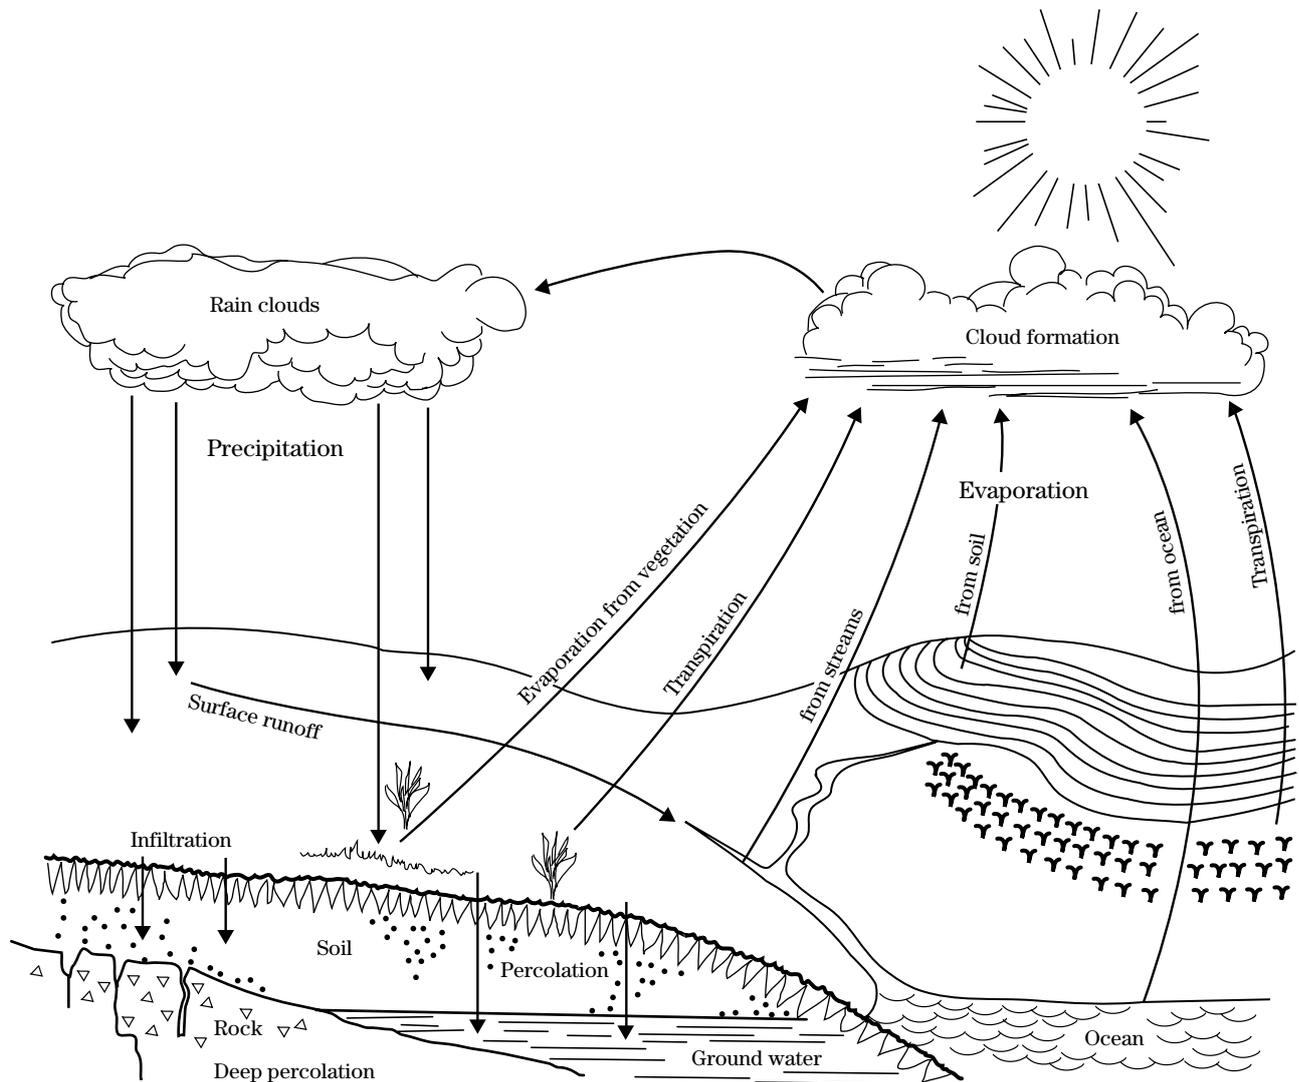

Issued May 2007

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, SW., Washington, DC 20250-9410, or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Acknowledgments

Chapter 7 was originally prepared by **Victor Mockus** (retired) and reprinted with minor revisions in 1972. This version was prepared by the U.S. Department of Agriculture, Natural Resources Conservation Service (NRCS) under guidance of **Jon Werner** (retired), NRCS; with assistance from **Donald E. Woodward** (retired), NRCS; **Robert Nielsen** (retired), NRCS; **Robert Dobos**, soil scientist, NRCS; and **Allen Hjelmfelt** (retired), Agricultural Research Service. It was finalized under the guidance of **Claudia C. Hoefl**, national hydraulic engineer.

Preface

This chapter of the National Engineering Handbook (NEH) Part 630, Hydrology, represents a multi-year collaboration between soil scientists at the National Soil Survey Center (NSSC) and engineers in the Conservation Engineering Division (CED) at National Headquarters to develop an agreed upon model for classifying hydrologic soil groups.

This chapter contains the official definitions of the various hydrologic soil groups. The National Soil Survey Handbook (NSSH) references and refers users to NEH630.07 as the official hydrologic soil group (HSG) reference. Updating the hydrologic soil groups was originally planned and developed based on this perspective.

Listing HSGs by soil map unit component and not by soil series is a new concept for the engineers. Past engineering references contained lists of HSGs by soil series. Soil series are continually being defined and re-defined, and the list of soil series names changes so frequently as to make the task of maintaining a single national list virtually impossible. Therefore, no such lists will be maintained. All such references are obsolete and their use should be discontinued.

Instructions for obtaining HSG information can be found in the introduction of this chapter.

Chapter 7

Hydrologic Soil Groups

Contents:	630.0700	Introduction	7-1
	630.0701	Hydrologic soil groups	7-1
	630.0702	Disturbed soils	7-5
	630.0703	References	7-5

Tables	Table 7-1	Criteria for assignment of hydrologic soil groups when a water impermeable layer exists at a depth between 50 and 100 centimeters [20 and 40 inches]	7-4
	Table 7-2	Criteria for assignment of hydrologic soil groups when any water impermeable layer exists at a depth greater than 100 centimeters [40 inches]	7-4

630.0700 Introduction

This chapter defines four hydrologic soil groups, or HSGs, that, along with land use, management practices, and hydrologic conditions, determine a soil's associated runoff curve number (NEH630.09). Runoff curve numbers are used to estimate direct runoff from rainfall (NEH630.10).

A map unit is a collection of areas defined and named the same in terms of their soil components or miscellaneous areas or both (NSSH 627.03). Soil scientists assign map unit components to hydrologic soil groups. Map unit components assigned to a specific hydrologic soil group have similar physical and runoff characteristics. Soils in the United States, its territories, and Puerto Rico have been assigned to hydrologic soil groups. The assigned groups can be found by consulting the Natural Resources Conservation Service's (NRCS) Field Office Technical Guide; published soil survey data bases; the NRCS Soil Data Mart Web site (<http://soildatamart.nrcs.usda.gov/>); and/or the Web Soil Survey Web site (<http://websoilsurvey.nrcs.usda.gov/>).

The state soil scientist should be contacted if a soil survey does not exist for a given area or where the soils within a watershed have not been assigned to hydrologic groups.

630.0701 Hydrologic soil groups

Soils were originally assigned to hydrologic soil groups based on measured rainfall, runoff, and infiltrometer data (Musgrave 1955). Since the initial work was done to establish these groupings, assignment of soils to hydrologic soil groups has been based on the judgment of soil scientists. Assignments are made based on comparison of the characteristics of unclassified soil profiles with profiles of soils already placed into hydrologic soil groups. Most of the groupings are based on the premise that soils found within a climatic region that are similar in depth to a restrictive layer or water table, transmission rate of water, texture, structure, and degree of swelling when saturated, will have similar runoff responses. The classes are based on the following factors:

- intake and transmission of water under the conditions of maximum yearly wetness (thoroughly wet)
- soil not frozen
- bare soil surface
- maximum swelling of expansive clays

The slope of the soil surface is not considered when assigning hydrologic soil groups.

In its simplest form, hydrologic soil group is determined by the water transmitting soil layer with the lowest saturated hydraulic conductivity and depth to any layer that is more or less water impermeable (such as a fragipan or duripan) or depth to a water table (if present). The least transmissive layer can be any soil horizon that transmits water at a slower rate relative to those horizons above or below it. For example, a layer having a saturated hydraulic conductivity of 9.0 micrometers per second (1.3 inches per hour) is the least transmissive layer in a soil if the layers above and below it have a saturated hydraulic conductivity of 23 micrometers per second (3.3 inches per hour).

Water impermeable soil layers are among those types of layers recorded in the component restriction table of the National Soil Information System (NASIS) database. The saturated hydraulic conductivity of an impermeable or nearly impermeable layer may range

from essentially 0 micrometers per second (0 inches per hour) to 0.9 micrometers per second (0.1 inches per hour). For simplicity, either case is considered impermeable for hydrologic soil group purposes. In some cases, saturated hydraulic conductivity (a quantitatively measured characteristic) data are not always readily available or obtainable. In these situations, other soil properties such as texture, compaction (bulk density), strength of soil structure, clay mineralogy, and organic matter are used to estimate water movement. Tables 7-1 and 7-2 relate saturated hydraulic conductivity to hydrologic soil group.

The four hydrologic soil groups (HSGs) are described as:

Group A—Soils in this group have low runoff potential when thoroughly wet. Water is transmitted freely through the soil. Group A soils typically have less than 10 percent clay and more than 90 percent sand or gravel and have gravel or sand textures. Some soils having loamy sand, sandy loam, loam or silt loam textures may be placed in this group if they are well aggregated, of low bulk density, or contain greater than 35 percent rock fragments.

The limits on the diagnostic physical characteristics of group A are as follows. The saturated hydraulic conductivity of all soil layers exceeds 40.0 micrometers per second (5.67 inches per hour). The depth to any water impermeable layer is greater than 50 centimeters [20 inches]. The depth to the water table is greater than 60 centimeters [24 inches]. Soils that are deeper than 100 centimeters [40 inches] to a water impermeable layer are in group A if the saturated hydraulic conductivity of all soil layers within 100 centimeters [40 inches] of the surface exceeds 10 micrometers per second (1.42 inches per hour).

Group B—Soils in this group have moderately low runoff potential when thoroughly wet. Water transmission through the soil is unimpeded. Group B soils typically have between 10 percent and 20 percent clay and 50 percent to 90 percent sand and have loamy sand or sandy loam textures. Some soils having loam, silt loam, silt, or sandy clay loam textures may be placed in this group if they are well aggregated, of low bulk density, or contain greater than 35 percent rock fragments.

The limits on the diagnostic physical characteristics of group B are as follows. The saturated hydraulic

conductivity in the least transmissive layer between the surface and 50 centimeters [20 inches] ranges from 10.0 micrometers per second (1.42 inches per hour) to 40.0 micrometers per second (5.67 inches per hour). The depth to any water impermeable layer is greater than 50 centimeters [20 inches]. The depth to the water table is greater than 60 centimeters [24 inches]. Soils that are deeper than 100 centimeters [40 inches] to a water impermeable layer or water table are in group B if the saturated hydraulic conductivity of all soil layers within 100 centimeters [40 inches] of the surface exceeds 4.0 micrometers per second (0.57 inches per hour) but is less than 10.0 micrometers per second (1.42 inches per hour).

Group C—Soils in this group have moderately high runoff potential when thoroughly wet. Water transmission through the soil is somewhat restricted. Group C soils typically have between 20 percent and 40 percent clay and less than 50 percent sand and have loam, silt loam, sandy clay loam, clay loam, and silty clay loam textures. Some soils having clay, silty clay, or sandy clay textures may be placed in this group if they are well aggregated, of low bulk density, or contain greater than 35 percent rock fragments.

The limits on the diagnostic physical characteristics of group C are as follows. The saturated hydraulic conductivity in the least transmissive layer between the surface and 50 centimeters [20 inches] is between 1.0 micrometers per second (0.14 inches per hour) and 10.0 micrometers per second (1.42 inches per hour). The depth to any water impermeable layer is greater than 50 centimeters [20 inches]. The depth to the water table is greater than 60 centimeters [24 inches]. Soils that are deeper than 100 centimeters [40 inches] to a restriction or water table are in group C if the saturated hydraulic conductivity of all soil layers within 100 centimeters [40 inches] of the surface exceeds 0.40 micrometers per second (0.06 inches per hour) but is less than 4.0 micrometers per second (0.57 inches per hour).

Group D—Soils in this group have high runoff potential when thoroughly wet. Water movement through the soil is restricted or very restricted. Group D soils typically have greater than 40 percent clay, less than 50 percent sand, and have clayey textures. In some areas, they also have high shrink-swell potential. All soils with a depth to a water impermeable layer less than 50 centimeters [20 inches] and all soils with a water table

within 60 centimeters [24 inches] of the surface are in this group, although some may have a dual classification, as described in the next section, if they can be adequately drained.

The limits on the physical diagnostic characteristics of group D are as follows. For soils with a water impermeable layer at a depth between 50 centimeters and 100 centimeters [20 and 40 inches], the saturated hydraulic conductivity in the least transmissive soil layer is less than or equal to 1.0 micrometers per second (0.14 inches per hour). For soils that are deeper than 100 centimeters [40 inches] to a restriction or water table, the saturated hydraulic conductivity of all soil layers within 100 centimeters [40 inches] of the surface is less than or equal to 0.40 micrometers per second (0.06 inches per hour).

Dual hydrologic soil groups—Certain wet soils are placed in group D based solely on the presence of a water table within 60 centimeters [24 inches] of the surface even though the saturated hydraulic conductivity may be favorable for water transmission. If these soils can be adequately drained, then they are assigned to dual hydrologic soil groups (A/D, B/D, and C/D) based on their saturated hydraulic conductivity and the water table depth when drained. The first letter applies to the drained condition and the second to the undrained condition. For the purpose of hydrologic soil group, adequately drained means that the seasonal high water table is kept at least 60 centimeters [24 inches] below the surface in a soil where it would be higher in a natural state.

Matrix of hydrologic soil group assignment criteria—The decision matrix in tables 7-1 and 7-2 can be used to determine a soil's hydrologic soil group. Check both tables before making a final decision. If saturated hydraulic conductivity data are available and deemed to be reliable, then these data, along with water table depth information, should be used to place the soil into the appropriate hydrologic soil group. If these data are not available, the hydrologic soil group is determined by observing the properties of the soil in the field. Factors such as texture, compaction (bulk density), strength of soil structure, clay mineralogy, and organic matter are considered in estimating the hydraulic conductivity of each layer in the soil profile. The depth and hydraulic conductivity of any water impermeable layer and the depth to any high water table are used to determine correct hydrologic soil group

for the soil. The property that is most limiting to water movement generally determines the soil's hydrologic group. In anomalous situations, when adjustments to hydrologic soil group become necessary, they shall be made by the NRCS state soil scientist in consultation with the state conservation engineer.

Table 7-1 Criteria for assignment of hydrologic soil groups when a water impermeable layer exists at a depth between 50 and 100 centimeters [20 and 40 inches]

Soil property	Hydrologic soil group A	Hydrologic soil group B	Hydrologic soil group C	Hydrologic soil group D
Saturated hydraulic conductivity of the least transmissive layer	>40.0 $\mu\text{m/s}$ (>5.67 in/h)	≤ 40.0 to >10.0 $\mu\text{m/s}$ (≤ 5.67 to >1.42 in/h)	≤ 10.0 to >1.0 $\mu\text{m/s}$ (≤ 1.42 to >0.14 in/h)	≤ 1.0 $\mu\text{m/s}$ (≤ 0.14 in/h)
	and	and	and	and/or
Depth to water impermeable layer	50 to 100 cm [20 to 40 in]	50 to 100 cm [20 to 40 in]	50 to 100 cm [20 to 40 in]	<50 cm [<20 in]
	and	and	and	and/or
Depth to high water table	60 to 100 cm [24 to 40 in]	60 to 100 cm [24 to 40 in]	60 to 100 cm [24 to 40 in]	<60 cm [<24 in]

Table 7-2 Criteria for assignment of hydrologic soil groups when any water impermeable layer exists at a depth greater than 100 centimeters [40 inches]

Soil property	Hydrologic soil group A	Hydrologic soil group B	Hydrologic soil group C	Hydrologic soil group D
Saturated hydraulic conductivity of the least transmissive layer	>10 $\mu\text{m/s}$ (>1.42 in/h)	≤ 10.0 to >4.0 $\mu\text{m/s}$ (≤ 1.42 to >0.57 in/h)	≤ 4.0 to >0.40 $\mu\text{m/s}$ (≤ 0.57 to >0.06 in/h)	≤ 0.40 $\mu\text{m/s}$ (≤ 0.06 in/h)
	and	and	and	and/or
Depth to water impermeable layer	>100 cm [>40 in]	>100 cm [>40 in]	>100 cm [>40 in]	>100 cm [>40 in]
	and	and	and	and/or
Depth to high water table	>100 cm [>40 in]	>100 cm [>40 in]	>100 cm [>40 in]	>100 cm [>40 in]

630.0702 Disturbed soils

As a result of construction and other disturbances, the soil profile can be altered from its natural state and the listed group assignments generally no longer apply, nor can any supposition based on the natural soil be made that will accurately describe the hydrologic properties of the disturbed soil. In these circumstances, an onsite investigation should be made to determine the hydrologic soil group. A general set of guidelines for estimating saturated hydraulic conductivity from field observable characteristics is presented in the Soil Survey Manual (Soil Survey Staff 1993).

630.0703 References

- Musgrave, G.W. 1955. How much of the rain enters the soil? *In* Water: U.S. Department of Agriculture. Yearbook. Washington, DC. pp. 151–159.
- Nielsen, R.D., and A.T. Hjelmfelt. 1998. Hydrologic soil group assessment. Water Resources Engineering 98. *In* Abt, Young-Pezeshk, and Watson (eds.), Proc. of Internat. Water Resources Eng. Conf., Am. Soc. Civil Engr: pp. 1297–1302.
- Rawls, W.J., and D.L. Brakensiek. 1983. A procedure to predict Green-Ampt infiltration parameters. *In* Advances in infiltration. Proc. of the National Conference on Advances in Infiltration. Chicago, IL.
- U.S. Department of Agriculture, Natural Resources Conservation Service. 1993. Soil Survey Manual. Agricultural Handbook No. 18, chapter 3. U.S. Government Printing Office, Washington, DC.
- U.S. Department of Agriculture, Natural Resources Conservation Service. 1993. National Engineering Handbook, title 210–VI. Part 630, chapters 9 and 10. Washington, DC. Available online at <http://directives.sc.egov.usda.gov/>.
- U.S. Department of Agriculture, Natural Resources Conservation Service. 2005. National Soil Survey Handbook, title 430–VI. Washington, DC. Available online at <http://soils.usda.gov/technical/handbook/>.

